

Dongguan Heyue Electronics Co., Ltd

DIMENSIONS(mm)

■ Chip Type

Fig.1 $\Phi D=8\sim10mm$






Fig.2 $\Phi D \geq 12.5mm$

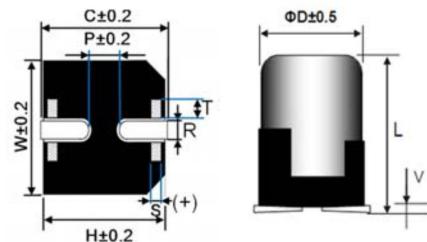

Size	ΦD	L	W	H	C	R	P	S	T	Vmax
8*10.5	8.0	10.5±0.5	8.3	8.3	9.0	0.7~1.1	3.2	0.7	1.3	0.3
10*10.5	10.0	10.5±0.5	10.3	10.3	11.0	1.0~1.4	4.5	0.7	1.3	0.3
12.5*13.5	12.5	13.5±1	13.5	13.5	14.2	1.0~1.4	4.5	2.2	2.4	0.4
16*16.5	16.0	16.5±1	17.0	17.0	18.0	1.4~1.8	6.4	3.0	2.0	0.4

Customer:	Electrolytic Capacitors										Heyue	
	HTV Series										Code	
Electric Characteristics:												
P/N	Heyue P/N	Cap. (μF)	Cap. Tol. (%)	Rate Volt. (V-DC)	Surge Volt. (V-DC)	Oper. Temp. ($^{\circ}C$)	Nominal Case Size	Leakage Current	D.F. MAX	R.C 100KHz (mA rms)	IMP 100KHz at 25 $^{\circ}C$ (Ω)Max	Load Life (hours)

REMARKS:

1. Leakage Current Test: 16V ~50V at 20 $^{\circ}C$ for 2 minutes ;
2. Operating temperature: 16V~50V -40 $^{\circ}C$ ~ +125 $^{\circ}C$;
3. Dissipation Factor Test: at 20 $^{\circ}C$, 120 Hz.
4. Capacitance Test: at 20 $^{\circ}C$, 120 Hz.
5. Ripple Current Test: at 125 $^{\circ}C$, 100K Hz ;
6. Load Life: $\Phi 8\sim\Phi 10$:2000hours; $\Phi 12.5$:3000hours ; $\Phi 16$: 5000hours with application of rated voltage at 125 $^{\circ}C$

Capacitance Change:

$\tan\delta$: Within ±30% of initial value;
300% or less of initial specified value;

Leakage Current:

Initial specified value or less;
The following specifications shall be satisfied when the capacitors are restored to 20 $^{\circ}C$ after exposing them for 1000 hours 125 $^{\circ}C$ without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to item 4.1 of JIS C5101-4.

Capacitance Change:

$\tan\delta$: Within ±30% of initial value;
300% or less of initial specified value;

Leakage Current:

Initial specified value or less;
Load life & shelf life test and etc. , judgment standard reference to our catalogue.

8. when have characteristic requested:
9. Remarks: Huyue Part Number with suffix code "A" is specially offered for automotive project, which meets AEC-Q200 standard.

•SPECIFICATION

Leakage Current 洩漏電流	After 2 minutes application of rated voltage, leakage current is not more than 0.01cv or 3(uA), whichever is greater.				
Dissipation Factor 散逸因素 (損失角) ($\tan\delta$)	Measurement Frequency:120Hz. Temperature:20 $^{\circ}C$				
	Rate Voltage(V)	16	25	35	50
	$\tan\delta$ (MAX)	0.20	0.20	0.14	0.14
Low Temperature Stability 低溫特性	Measurement Frequency:120Hz.				
Impedance Ratio(MAX) 阻抗比率(MAX)	Rate Voltage(V)	16	25	35	50
	$Z(-25^{\circ}C)/Z(20^{\circ}C)$	5	2	2	2
	$Z(-40^{\circ}C)/Z(20^{\circ}C)$	8	4	3	3

•Frequency Coefficient of Permissible Ripple Current

Frequency (Hz) Coefficient (μF)	100 \leq F $<$ 1K	1K \leq F $<$ 10K	10K \leq F $<$ 100K	100K \leq F
全系列	0.60	0.85	0.93	1.00

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5 $^{\circ}C$ rise.

When long life performance is required in actual use, the rms ripple current has to be reduced.