

CGV series

sales016@heyuecap.com

- Chip type with 8Φ~16Φ, 125°C, 1500 hours~2000 hours, long life product.
- Designed For automobile modules and other high temperature applications.
- Peak acceleration: 30G
- RoHS Compliance.
- 8Φ~16ΦV-Chip 型, 125°C, 1500小時~2000小時 長壽命產品。
- 專為汽車模塊和其它高溫應用設計。
- 峰值加速度：30G。



SPECIFICATIONS

Items 項目	Characteristics 特性								
Capacitance Tolerance 靜電容量誤差	± 20%(120Hz,20°C)								
Operating Temperature Range 適用溫度範圍	-55 ~ +125°C								
Rated Voltage Range 額定電壓範圍	6.3 ~ 100VDC								
Capacitance Range 靜電容量範圍	1 ~ 4700μF								
Leakage Current 洩漏電流	I ≤ 0.01CV or 3(μA) · which is greater. (After 3 minutes application of DC rated voltage, at 20°C)								
Dissipation Factor 散逸因素(tan δ)	Measurement Frequency: 120Hz. Temperature: 20°C								
	Rated Voltage(V)	6.3	10	16	25	35	50	63	100
	tan δ(Max)	0.30	0.24	0.20	0.16	0.14	0.14	0.12	0.10
Low Temperature Stability 低溫特性 Impedance Ratio(Max) 阻抗比率(最大值)	Measurement Frequency: 120Hz.								
	Rated Voltage(V)	6.3	10	16	25	35	50	63	100
	Z(-25°C)/Z(20°C)	4	3	2	2	2	2	2	2
	Z(-40°C)/Z(20°C)	8	6	4	3	3	3	3	3
Load Life 負荷壽命	6.3V~50V:2,000hours;63V~100V:1,500 hours with application of rated voltage at 125°C								
	Capacitance Change	within ±30% of Initial Value							
	tan δ	300% or less of Initial Specified Value							
	Leakage Current	Initial Specified Value or less							
Shelf Life 放置壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.								
	Capacitance Change	Within ± 30% of Initial Value							
	tan δ	300% or less of Initial Specified Value							
	Leakage Current	Initial Specified Value or less							
Resistance to Soldering Heat 焊錫耐熱性	The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature they meet the characteristics requirements listed at right.				Capacitance Change		Within ± 10% of Initial Value		
					tan δ		Initial Specified Value		
					Leakage Current		Initial Specified Value or less		
Standards 參照標準	IEC 60384-4 (JIS C 5101-4)								

Frequency Coefficient of Permissible Ripple Current


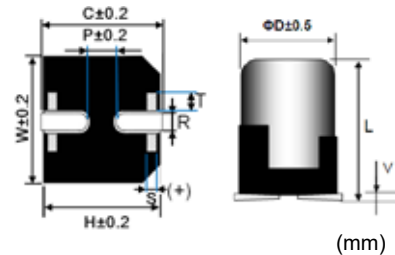

Frequency (Hz)	100 $\leq$ F < 1K	1K $\leq$ F < 10K	10K $\leq$ F < 100K	100K $\leq$ F
Capacitance (μ F)				
C $\leq$ 22	0.50	0.80	0.90	1.00
22 < C $\leq$ 150	0.65	0.85	0.92	1.00
150 < C	0.70	0.85	0.95	1.00

CGV series

sales016@heyuecap.com

DIMENSIONS(mm)

Chip Type

Fig.1 $\Phi D=8\sim 10\text{mm}$ Fig.2 $\Phi D\geq 12.5\text{mm}$ 

(mm)

Size	ΦD	L	W	H	C	R	P	S	T	Vmax
8 × 10.5	8.0	10.5 ± 0.5	8.3	8.3	9.0	1.0~1.4	3.2	0.7	1.3	0.3
10 × 10.5	10.0	10.5 ± 0.5	10.3	10.3	11.0	1.0~1.4	4.5	0.7	1.3	0.3
12.5 × 13.5	12.5	13.5 ± 1.0	13.5	13.5	14.2	1.1~1.4	4.5	2.2	2.4	0.4
16 × 16.5	16.0	16.5 ± 1.0	17.0	17.0	18.0	1.4~1.8	6.4	3.0	2.0	0.4

STANDARD RATINGS

D×L(mm) ; R.C.(mA rms) at 125°C 100KHz, ESR(Ω max) at 20°C 100KHz.

Cap (μF)	V	6.3			10			16			25		
		D x L	R.C.	ESR	DxL	R.C.	ESR	D x L	R.C.	ESR	D x L	R.C.	ESR
100								8x10.5	160	0.40	8x10.5	160	0.40
220					8x10.5	160	0.40	8x10.5	160	0.40	8x10.5	160	0.40
											10x10.5	220	0.30
330	8x10.5	160	0.40		8x10.5	160	0.40	10x10.5	220	0.30	10x10.5	220	0.30
470	8x10.5	160	0.40		10x10.5	220	0.30	12.5x13.5	550	0.12	12.5x13.5	550	0.12
680	10x10.5	220	0.30		12.5x13.5	550	0.12	12.5x13.5	550	0.12	12.5x13.5	550	0.12
1000	12.5x13.5	550	0.12		12.5x13.5	550	0.12	12.5x13.5	550	0.12	16x16.5	900	0.080
1500	12.5x13.5	550	0.12		12.5x13.5	550	0.12	16x16.5	900	0.080	16x16.5	900	0.080
2200	12.5x13.5	550	0.12		16x16.5	900	0.080	16x16.5	900	0.080			
3300	16x16.5	900	0.08		16x16.5	900	0.080						
4700	16x16.5	900	0.08										

Cap (μF)	V	35			50			63			100		
		D x L	R.C.	ESR	DxL	R.C.	ESR	D x L	R.C.	ESR	D x L	R.C.	ESR
10											8x10.5	70	1.00
22								8x10.5	100	1.00	8x10.5	70	1.00
33					8x10.5	140	0.70	8x10.5	100	1.00	10x10.5	115	0.80
47					8x10.5	140	0.70	8x10.5	100	1.00	12.5x13.5	350	0.33
	8x10.5	160	0.40		10x10.5	240	0.50	10x10.5	150	0.50			
100	8x10.5	160	0.40		10x10.5	240	0.50	10x10.5	150	0.50	16x16.5	500	0.24
	10x10.5	220	0.30		12.5x13.5	490	0.23	12.5x13.5	350	0.25			
220	10x10.5	220	0.30		12.5x13.5	490	0.23	12.5x13.5	350	0.25			
	12.5x13.5	550	0.12					16x16.5	500	0.18			
330	12.5x13.5	550	0.12		12.5x13.5	490	0.23	16x16.5	500	0.18			
					16x16.5	800	0.15						
470.0	12.5x13.5	550	0.12		16x16.5	800	0.15	16x16.5	500	0.18			
	16x16.5	900	0.080										
680.0	16x16.5	900	0.080		16x16.5	800	0.15						
1000.0	16x16.5	900	0.080										