

# M5 series

sales016@heyuecap.com

- Subminiature product, Low impedance, 105°C , 1000 hours
- Applicable to small electronic devices.
- Height: 5mm.
- RoHS Compliance
- 105°C 低阻抗、超小型1000小時壽命產品。
- 適用於小型電子設備。
- 高度：5mm系列。



## SPECIFICATIONS

| Items 項目                                                               | Characteristics 特性                                                                                                                                                                                                                                                                 |                                         |      |      |      |       |      |
|------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|------|------|------|-------|------|
| Capacitance Tolerance<br>靜電容量誤差                                        | ± 20%(120Hz,20℃)                                                                                                                                                                                                                                                                   |                                         |      |      |      |       |      |
| Operating Temperature Range<br>適用溫度範圍                                  | -40 ~ +105℃                                                                                                                                                                                                                                                                        |                                         |      |      |      |       |      |
| Rated Voltage Range<br>額定電壓範圍                                          | 6.3 ~ 35VDC                                                                                                                                                                                                                                                                        |                                         |      |      |      |       |      |
| Leakage Current<br>洩漏電流                                                | I ≤ 0.01CV or 3 (μA) which is greater.( After 2 minutes application of DC rated voltage, at 20 ℃)                                                                                                                                                                                  |                                         |      |      |      |       |      |
| Dissipation Factor<br>散逸因素(tan δ)                                      | Measurement Frequency: 120Hz. Temperature: 20℃                                                                                                                                                                                                                                     |                                         |      |      |      |       |      |
|                                                                        | Rated Voltage(V)                                                                                                                                                                                                                                                                   | 6.3                                     | 10   | 16   | 25   | 35    | 50   |
|                                                                        | tan δ(Max)                                                                                                                                                                                                                                                                         | 0.22                                    | 0.20 | 0.18 | 0.14 | 0.12  | 0.10 |
| Low Temperature Stability<br>低溫特性<br>Impedance Ratio(Max)<br>阻抗比率(最大值) | Measurement Frequency: 120Hz.                                                                                                                                                                                                                                                      |                                         |      |      |      |       |      |
|                                                                        | Rated Voltage(V)                                                                                                                                                                                                                                                                   | 6.3                                     | 10   | 16   | 25   | 35~50 |      |
|                                                                        | Z(-25℃)/Z(20℃)                                                                                                                                                                                                                                                                     | 2                                       | 2    | 2    | 2    | 2     |      |
|                                                                        | Z(-40℃)/Z(20℃)                                                                                                                                                                                                                                                                     | 4                                       | 4    | 3    | 3    | 3     |      |
|                                                                        |                                                                                                                                                                                                                                                                                    |                                         |      |      |      |       |      |
| Load Life 負荷壽命                                                         | 1000hours,with application of rated voltage at 105℃                                                                                                                                                                                                                                |                                         |      |      |      |       |      |
|                                                                        | Capacitance Change                                                                                                                                                                                                                                                                 | Within ± 20% of Initial Value           |      |      |      |       |      |
|                                                                        | tan δ                                                                                                                                                                                                                                                                              | 200% or less of Initial Specified Value |      |      |      |       |      |
|                                                                        | Leakage Current                                                                                                                                                                                                                                                                    | Initial Specified Value or less         |      |      |      |       |      |
| Shelf Life 放置壽命                                                        | The following specifications shall be satisfied when the capacitors are restored to 20℃ after exposing them for 500 hours 105℃ without voltage applied. Before the measurement. The Capacitance shall be preconditioned by applying voltage according to them 4.1 of JIS C 5101-4. |                                         |      |      |      |       |      |
|                                                                        | Capacitance Change                                                                                                                                                                                                                                                                 | Within ± 20% of Initial Value           |      |      |      |       |      |
|                                                                        | tan δ                                                                                                                                                                                                                                                                              | 200% or less of Initial Specified Value |      |      |      |       |      |
|                                                                        | Leakage Current                                                                                                                                                                                                                                                                    | Initial Specified Value or less         |      |      |      |       |      |
| Standards 參照標準                                                         | IEC 60384-4(JIS C 5101-4 )                                                                                                                                                                                                                                                         |                                         |      |      |      |       |      |


## Frequency Coefficient of Permissible Ripple Current

| Frequency (Hz) | 50   | 120  | 300  | 1K   | 10K ~ 100K |
|----------------|------|------|------|------|------------|
| Coefficient    | 0.50 | 0.65 | 0.70 | 0.90 | 1.00       |

M5 series

sales016@heyuecap.com

DIMENSIONS(mm)

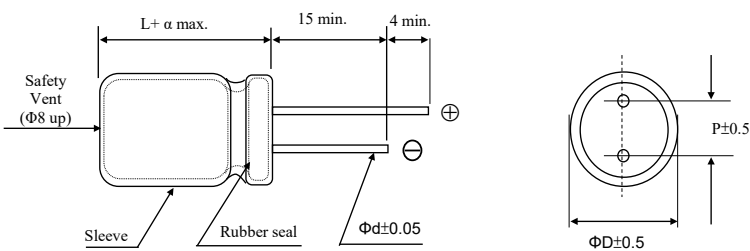

|    |      |      |      |
|----|------|------|------|
| ΦD | 4    | 5    | 6.3  |
| P  | 1.5  | 2.0  | 2.5  |
| Φd | 0.45 | 0.45 | 0.45 |

$\alpha = 1.5$

STANDARD RATINGS

D×L(mm) ; R.C.(mA rms) at 105°C 100KHz, IMP ( Ω max) at 20°C 100KHz.

| Cap<br>(μF) | V    | 6.3   |      |     | 10    |      |     | 16    |      |     |
|-------------|------|-------|------|-----|-------|------|-----|-------|------|-----|
|             | Item | D x L | R.C. | IMP | D x L | R.C. | IMP | D x L | R.C. | IMP |
| 10          |      |       |      |     |       |      |     | 4x5   | 55   | 5.0 |
| 15          |      |       |      |     |       |      |     | 5x5   | 80   | 2.6 |
| 22          |      | 4x5   | 52   | 5.0 | 5x5   | 80   | 2.6 | 5x5   | 82   | 2.5 |
| 33          |      | 5x5   | 82   | 2.5 | 5x5   | 82   | 2.5 | 6.3x5 | 113  | 1.3 |
| 47          |      | 5x5   | 85   | 2.5 | 6.3x5 | 115  | 1.2 | 6.3x5 | 115  | 1.2 |
| 68          |      | 6.3x5 | 118  | 1.3 |       |      |     |       |      |     |
| 100         |      | 6.3x5 | 120  | 1.2 |       |      |     |       |      |     |

| Cap<br>(μF) | V    | 25    |      |     | 35    |      |     |
|-------------|------|-------|------|-----|-------|------|-----|
|             | Item | D x L | R.C. | IMP | D x L | R.C. | IMP |
| 1           |      |       |      |     | 4x5   | 48   | 5.0 |
| 1.5         |      |       |      |     | 4x5   | 49   | 4.9 |
| 2.2         |      |       |      |     | 4x5   | 50   | 4.9 |
| 3.3         |      |       |      |     | 4x5   | 52   | 4.8 |
| 4.7         |      | 4x5   | 49   | 5.0 | 4x5   | 55   | 4.8 |
| 6.8         |      | 4x5   | 52   | 4.8 | 5x5   | 80   | 2.6 |
| 10          |      | 5x5   | 82   | 2.5 | 5x5   | 85   | 2.5 |
| 15          |      | 6.3x5 | 116  | 1.3 | 6.3x5 | 116  | 1.3 |
| 22          |      | 6.3x5 | 118  | 1.2 | 6.3x5 | 118  | 1.2 |
| 33          |      | 6.3x5 | 120  | 1.1 |       |      |     |